

Weatherstrips for frames and casements

Dual component solid/cellular rubber.

Weatherstrip for frames and casements made from two different types of EPDM rubber.

The backing is made from solid 80° Shore rubber, which permits easy fitting and locates the profile securely in the groove.


The hollow sealing section is made from cellular rubber. This reduces the closing force and accommodates small variations in dimensions to ensure an optimum seal.

Advantages of weatherstrip:


- excellent resistance to settlement.
- no water absorption.
- resistant to ozone and UV light = long life.
- withstands acrylic paint.
- continuous loop, no joining.
- easy to fit.



Casement weatherstrip

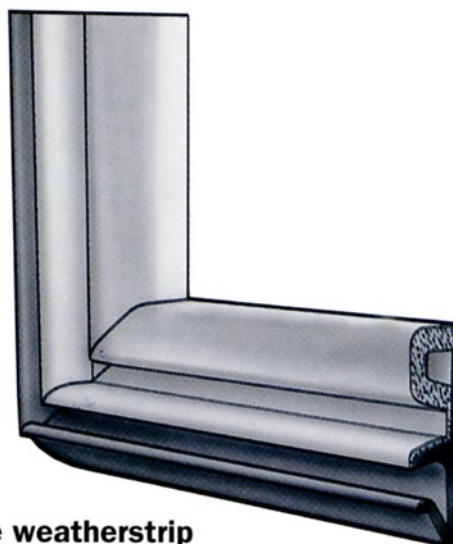

Frame weatherstrip

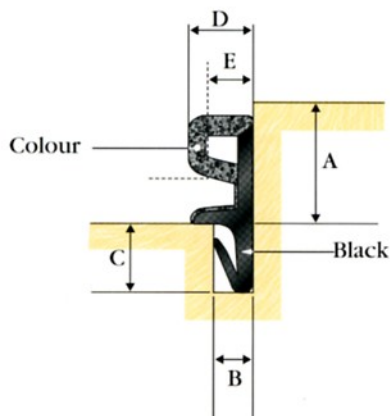

| Product no. | Backing mm | | Groove mm | | Profile height | Gap | | Colour | Metres per roll |
|-----------------|------------|------------|-----------|------------|----------------|--------------|------------|--------|-----------------|
| | A | B | C | D | E | | | | |
| 71091430 | 12 | 4/5 | 8 | 7,5 | 5 | Beige | 150 | | |
| 71091431 | 12 | 4/5 | 8 | 7,5 | 5 | Brown | 150 | | |
| 71091432 | 12 | 4/5 | 8 | 7,5 | 5 | White | 150 | | |
| 71091433 | 12 | 4/5 | 8 | 7,5 | 5 | Black | 150 | | |
| 71091434 | 12 | 4/5 | 8 | 7,5 | 5 | Grey | 150 | | |
| 70085660 | 15 | 4/5 | 8 | 7,5 | 5 | Black | 150 | | |
| 70085661 | 15 | 4/5 | 8 | 7,5 | 5 | Brown | 150 | | |
| 70085662 | 15 | 4/5 | 8 | 7,5 | 5 | White | 150 | | |
| 70085673 | 18 | 4/5 | 8 | 7,5 | 5 | Black | 125 | | |
| 70085674 | 18 | 4/5 | 8 | 7,5 | 5 | Brown | 125 | | |
| 70085675 | 18 | 4/5 | 8 | 7,5 | 5 | White | 125 | | |

Bold type = stock item

Business Unit Industrial Profiles

Värnamo:

Trelleborg Building Systems AB
P.O.Box 1004 SE-331 29 Värnamo, Sweden.
Telephone: +46 370 48100. Fax: +46 370 48230.
Internet: www.trelleborg.com

Rydaholm:

Trelleborg Horda AB
P.O. Box 9, SE-330 17 Rydaholm, Sweden
Telephone: +46 472 25800. Fax: +46 472 25030.
Internet: www.trelleborg.com